



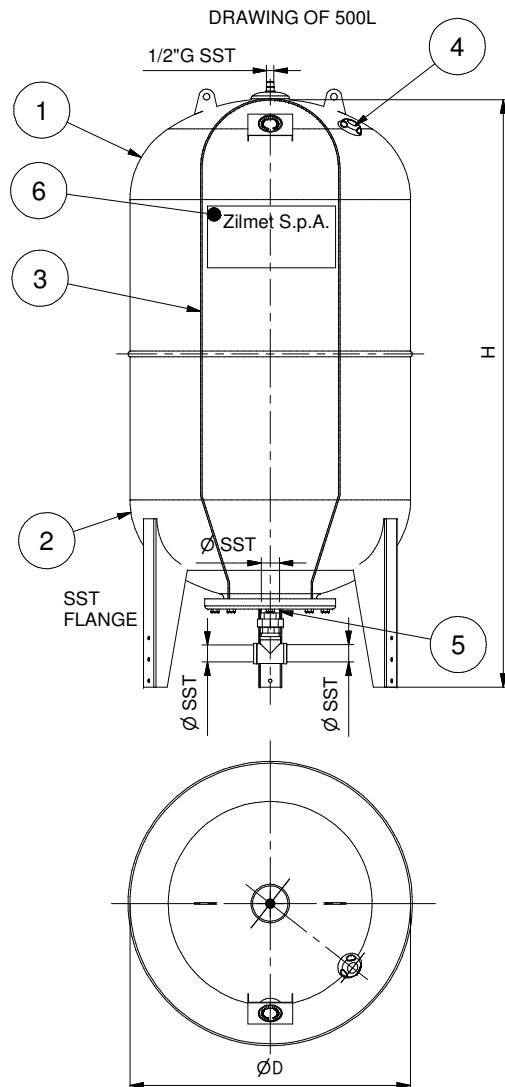

CODE	CAPACITY	ØD	H	Ø SST
1102006000	60L	380	860	1" G
1102008001	80L	450	830	1" G
1102010002	100L	450	910	1" G
1102020003	200L	550	1235	1 1/2" G
1102030005	300L	630	1365	1 1/2" G
1102050004	500L	750	1560	1 1/2" G
1102075005	750L	750	2075	1 1/2" G

The dimensions are in mm

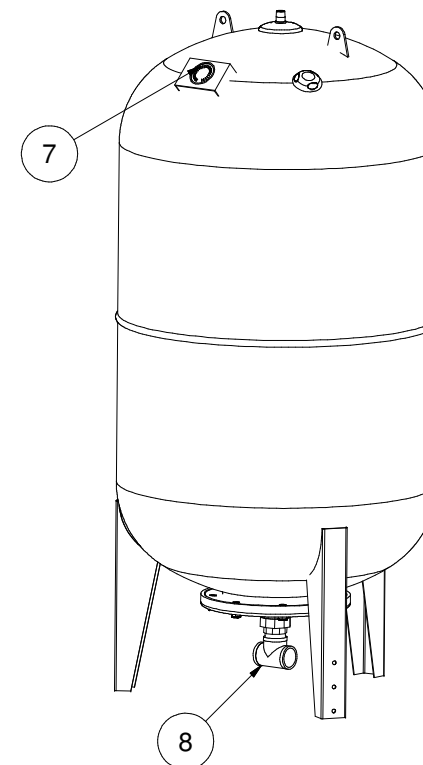

Max operating pressure: 10 Bar
 System temperature: -10° / +99° C
 Membrane temperature: -10° / +70° C
 Factory precharge: 4 +/-20% bar
 Nominal volume: 60-80-100-200-300-500-750 litres
 Colour: BLUE

*: WITH BLUE INSIDE EPOXY POWDER

1	UPPER HEAD*	1	CARBON STEEL
2	DOWNER HEAD*	1	CARBON STEEL
3	MEMBRANE	1	BUTYL DIN 4807-3
4	PRECHARGE VALVE	1	BRASS
5	THREADED NOZZLE	1	SST INOX
6	SELF-ADHESIVE LABEL	1	-
7	MANOMETER P MAX 10BAR	1	-
8	"T" CONNECTION	1	SST INOX
Pos.	Denomination	Q.ty	MATERIAL

All dimension tollerances not indicated are ± 2% for lenght and ± 3 mm for diameter.

REV 0	DESCRIZIONE Issued for costruction	DATA 05/05/09
ZILMET S.P.A. 35010 Limena (PD) Via del Santo 242 tel.049/7664901	DRAWING N° 20014	SCALE
Denomination HYDRO-PLUS DUOTM 60÷750L WITH "T" CONNECTION	Drawn GIBIN G. Date 06-05-09 Checked ORLUNGH L. Date 06-05-09 Approved S.RI BENETTOLO Date 06-05-09	CODE 11020----- This drawing is property of company ZILMET S.p.A. All rights reserved.