


R984



Radiant
Systems

Steam barrier sheet for radiant floor systems

Datasheet
1181EN 04/2025

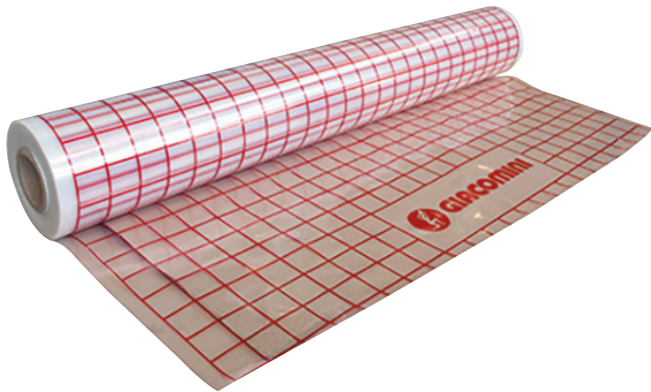

Steam barrier sheet for radiant floor systems.
Printed mesh for easy pipe installation.
Supplied in rolls of 1,25 x 100 m.

➤ Versions and codes

PRODUCT CODE	ROLL SIZE [m]
R984Y015	1,25 x 100

➤ Technical data

- Printed mesh size: 50 x 50 mm
- Steam diffusion resistance factor μ (μ) ≥ 10000
- Dynamic stiffness SD > 100 MN/m³
- Material: polyethylene steam barrier sheet
- Thickness: 200 μ m

➤ Product specifications

R984

Steam barrier sheet for radiant floor systems. Printed mesh 50 x 50 mm for easy pipe installation. Roll size 1,25 x 100 m. Steam diffusion resistance factor μ (μ) ≥ 10000 . Dynamic stiffness SD > 100 MN/m³. Material: polyethylene steam barrier sheet. Thickness: 200 μ m.

Safety Warning. Installation, commissioning and periodical maintenance of the product must be carried out by qualified operators in compliance with national regulations and/or local standards. A qualified installer must take all required measures, including use of Individual Protection Devices, for his and others' safety. An improper installation may damage people, animals or objects towards which Giacomini S.p.A. may not be held liable.

Package Disposal. Carton boxes: paper recycling. Plastic bags and bubble wrap: plastic recycling.

Additional information. For more information, go to giacomini.com or contact our technical assistance service. This document provides only general indications. Giacomini S.p.A. may change at any time, without notice and for technical or commercial reasons, the items included herewith. The information included in this technical sheet do not exempt the user from strictly complying with the rules and good practice standards in force.

Product Disposal. Do not dispose of product as municipal waste at the end of its life cycle. Dispose of product at a special recycling platform managed by local authorities or at retailers providing this type of service.