


KROGELNA NAVOJNA NERJAVNA PIPA

1/4" – 3"

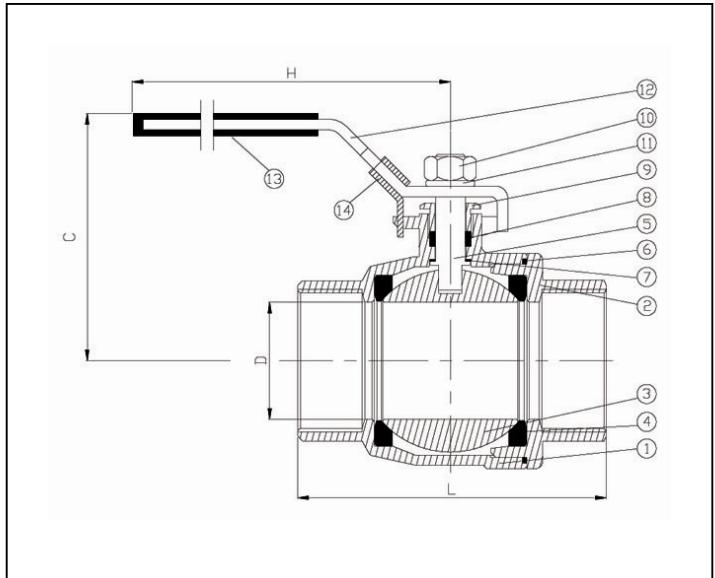

Opis:

Polni pretok, navoj po ISO-228,
dolžina navoja po ISO-7/1

Pritisk:

PN63 za 1/4" do 1-1/2"
PN40 za 2" do 3"

Temperatura:

-10°C do 230°C


Tesnilo:

PTFE

Vreteno:

Oblika vretena omogoča menjavo tesnil pod tlakom
(»Blow out proof«)

PRITISK/TEMPERATURA

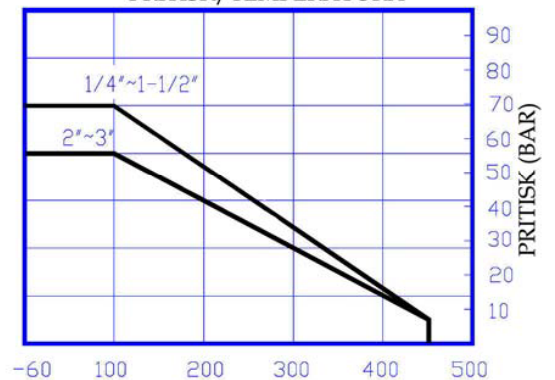

DIMENZIJE (mm)						
Velikost	D	L	C	H	Teža (kg)	Navor (Nm)
1/4"	11.5	55.3	56.1	105	0.27	3
3/8"	12.5	55.3	55.8	105	0.25	3
1/2"	15	64.7	57.6	105	0.30	4
3/4"	20	73.4	66.6	125	0.50	6
1"	25	84.8	77.7	152	0.80	11
1-1/4"	32	99.5	83.8	152	1.20	15
1-1/2"	38	112.7	95.7	191	1.75	17
2"	49	129	102.3	191	2.80	33
2-1/2"	65	170	142	255	6.60	30
3"	80	192	152.5	255	9.90	40

MATERIALI			
št.	Del	Materiali	Količina
1	Ohišje	CF8M	1
2	Pokrov ohišja	CF8M	1
3	Krogla	A316	1
4	Tesnilo	PTFE	2
5	Vreteno	A316	1
6	Tesnilo ohišja	PTFE	1
7	Podložka	PTFE	1
8	Tesnilo vretena	PTFE	2
9	Pritisna puša	A304	1
10	Matica vretena	A304	1
11	podložka	A304	1
12	Ročka	A304	1
13	Držalo ročke	Plastika	1
14	Sistem za zaklepanje	A304	1

