

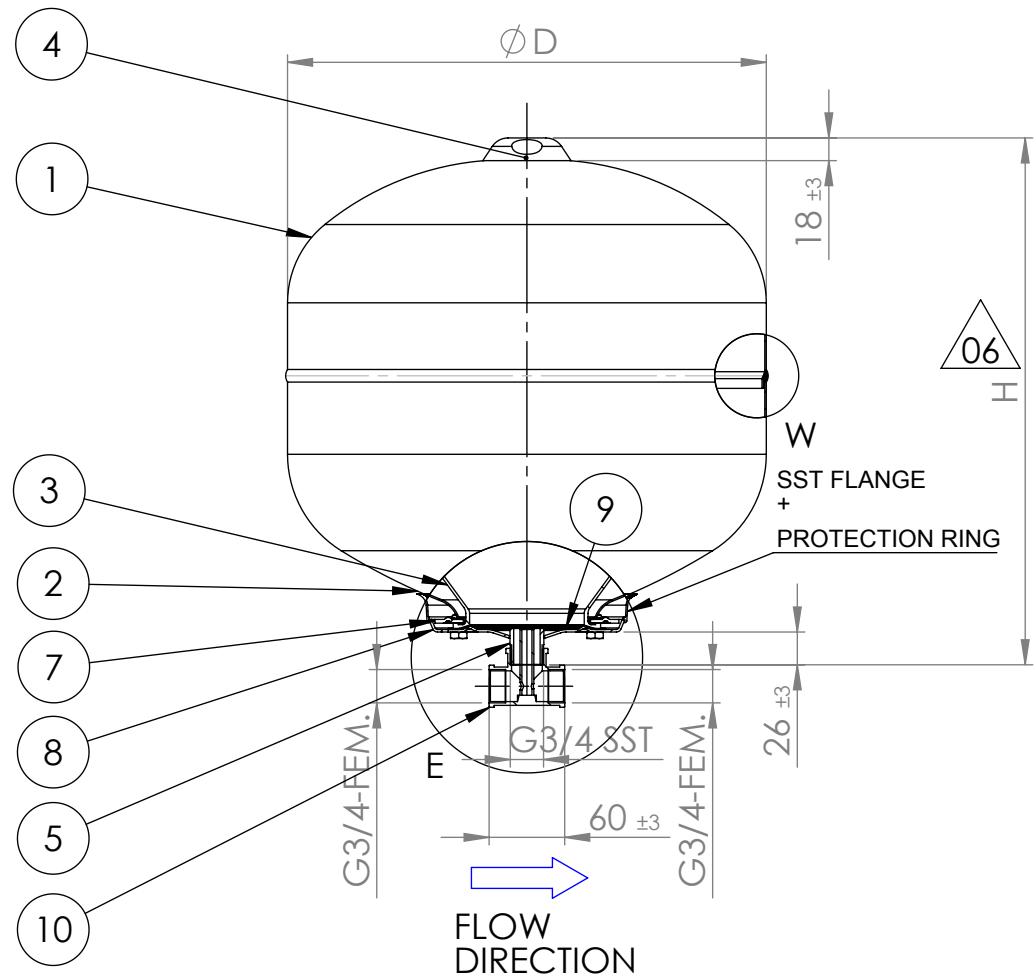


TYPE (litres)	CODE	ØD (mm)	H (mm)
8	11D0000801	199	335
12	11D0001201	270	310
18	11D0001801	270	411
25	11D0002501	270	485
35	11D0003501	380	418

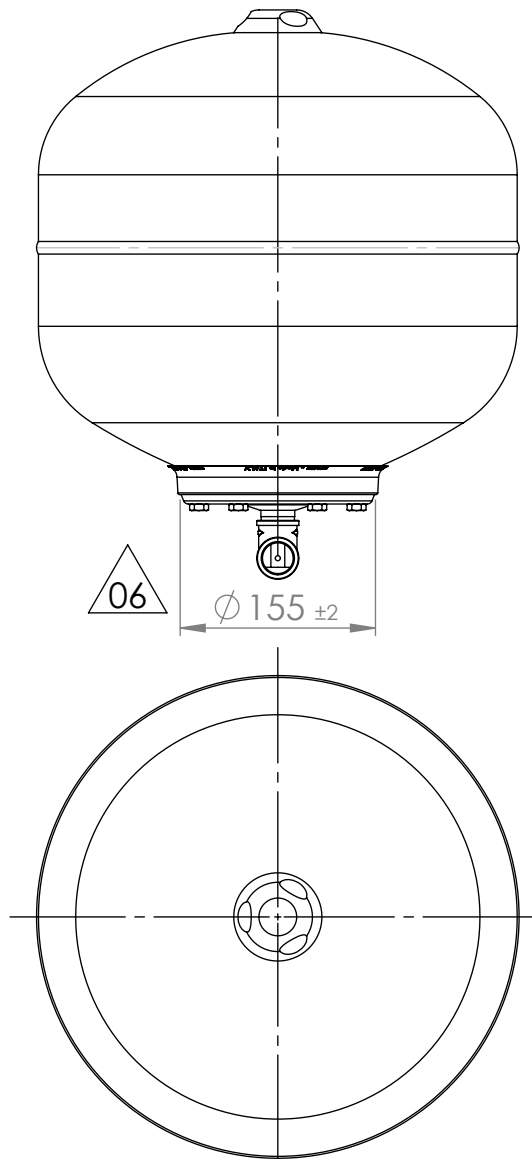




Max operating pressure: 10 bar
System temperature: -10 / +99 °C
Membrane temperature: -10 / +70 °C
Factory precharge: 4,0 +/-20% bar
Nominal volume: 8-12-18-25-35 litres
Colour: White

Internal coating painting: Blue colour

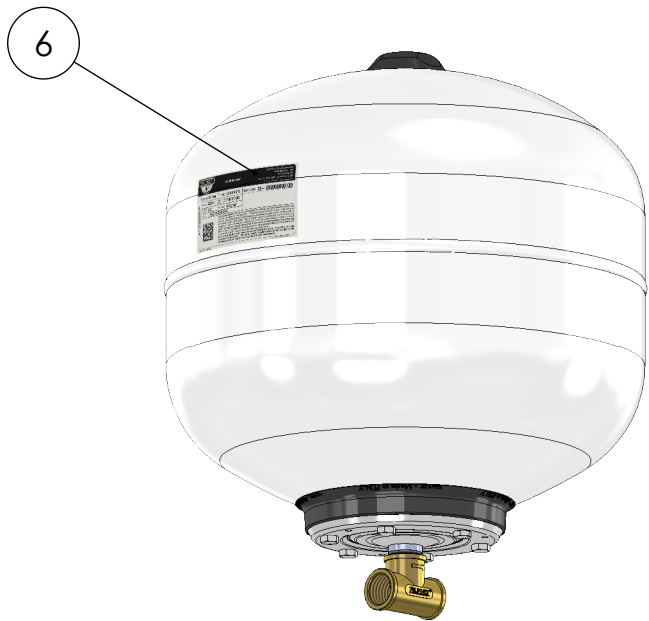

1	UPPER HEAD	1	CARBON STEEL
2	DOWNER HEAD	1	CARBON STEEL
3	MEMBRANE	1	ZILAN DW
4	PRECHARGE VALVE	1	BRASS
5	THREADED NOZZLE	1	STAINLESS STEEL AISI304
6	SELF-ADHESIVE LABEL	1	-
7	RING FLANGE	1	CARBON STEEL
8	CLOSURE FLANGE	1	CARBON STEEL GALVANIZED
9	INTERNAL FLANGE	1	STAINLESS STEEL AISI304
10	FLOW EQUIPMENT	1	BRASS
11	-	-	-
Pos.	Denomination	Q.ty	Material

Revisioni		
Rev.	Descrizione	Data
04	Flange material stainless steel AISI304	12/12/2012
05	System temperature -10/+99°C (was -10/+70°C)	28/02/2014
06	Redesigned with S.W.; nominal dimensions	26/04/2017

 Zilmet S.p.a. Via del Santo,242 35010 Limena (PD)-ITALY Tel. +39 049 7664901 Fax +39 049 767321 www.zilmet.com zilmet@zilmet.it	DRAWING N° 20014		SCALE 1:6	MATERIAL SEE TABLE	 Dimensions in mm
	*:Tolerance variation bigger/lower than 20% do not compromise the expansion vessel functioning			CODE 11D000....	
	DRAWN GIBIN G.	DATE 26/04/2017			
	CHECKED FALCOMER S.	DATE 26/04/2017			
APPROVED S.ri BENETTOLO		DATE 26/04/2017		This drawing is property of comp Zilmet S.p.a. All rights reserv	
DENOMINATION ZILFLEX HYDROFLEX 8÷35L					A3

All dimension tolerances not indicated are ± 2% for lenght and ± 3mm for diameter